





PHOENIX

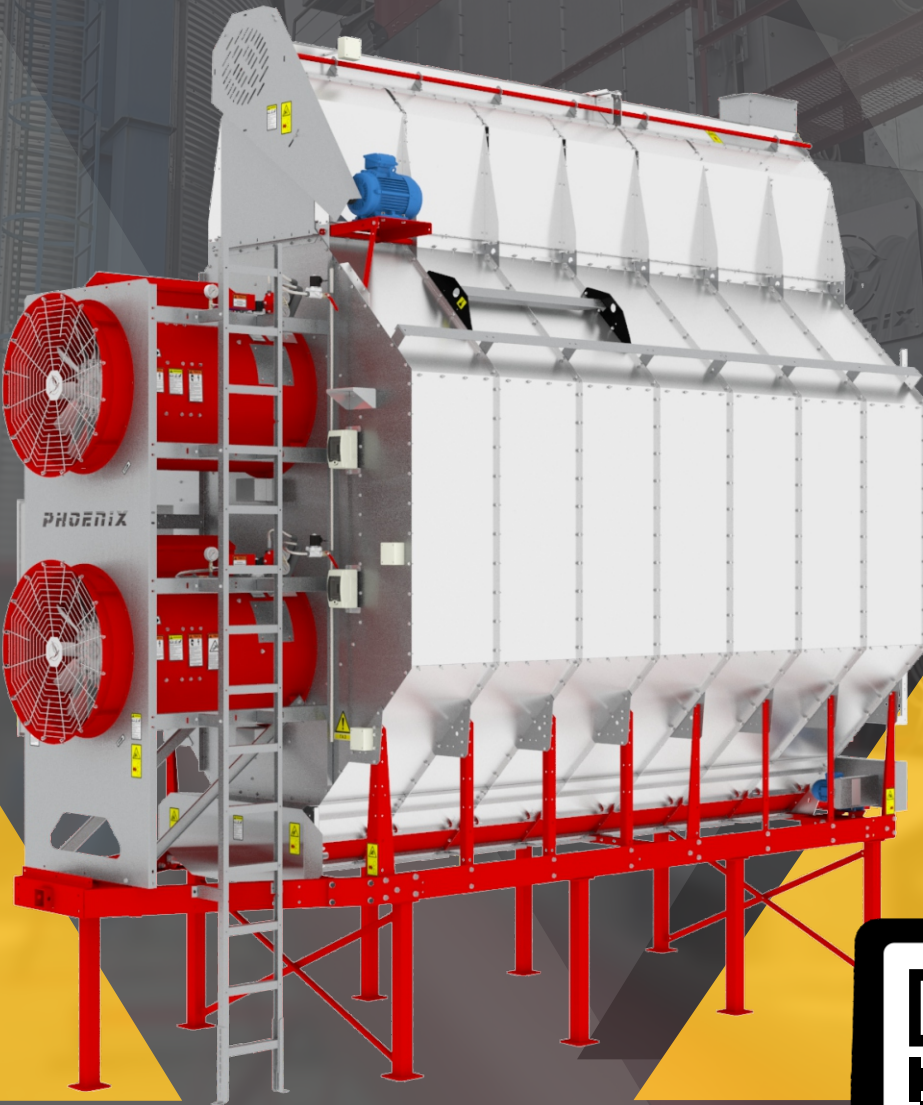

phoenixtec.com.ua

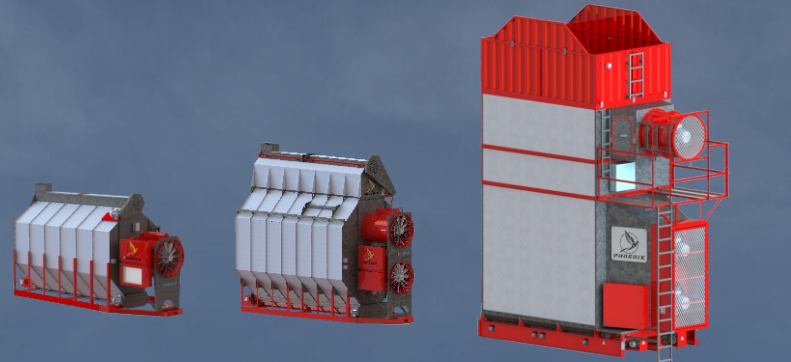

| Model | ZSP | ZSM | ZSK-02 | ZSK-03 | ZSK-04 |
|--|-----------|-----------|-----------|-----------|-----------|
| Capacity, m ³ | 6 | 15 | 27 | 30 | 37 |
| Thickness of grain columns, mm | 300 | 368 | 300 | 300 | 300 |
| Grain bin thickness (excluding hopper), mm | 3000 | 3500 | 4200 | 5000 | 6200 |
| Drying Capacity, corn (25%-15%), heat + cool mode (metric tonnes/24 hours) | 50 | 100 | 200 | 300 | 350 |
| Drying Capacity, corn (20%-15%), heat + cool mode (metric tonnes/24 hours) | 70 | 140 | 250 | 400 | 425 |
| Drying Capacity, corn (25%-15%), all-heat mode (metric tonnes/24 hours) | 70 | 180 | 275 | 375 | 425 |
| Drying Capacity, corn (20%-15%), all-heat mode (metric tonnes/24 hours) | 90 | 250 | 320 | 450 | 500 |
| Number of fans | 1 | 2 | 2 | 3 | 3 |
| Air flow, m ³ /hour//Full pressure, Pa (pre-heat mode) at +10 °C | - | - | - | 42400/570 | 42400/570 |
| Air flow, m ³ /hour//Full pressure, Pa (full-heat mode) at +10 °C | 25300/415 | 36600/641 | 42400/570 | 42400/570 | 42400/570 |
| Air flow, m ³ /hour//Full pressure, Pa (cool mode) at +10 °C | 25300/415 | 36600/641 | 51200/651 | 51200/651 | 51200/651 |
| Total electrical power of fans (kW) | 11/7,5 | 22 | 30 | 45 | 45 |
| Feeding auger, HP (kW) | 3 | 5,5 | - | - | - |
| Unloading auger, HP (kW) | 3 | 3 | 4,0 | 4,0 | 4,0 |
| Rotary shafts, HP (kW) | - | 0,37 | 1,1 | 1,1 | 1,1 |
| Total electrical power, (kW) | 17/13,5 | 30,87 | 35,1 | 50,1 | 50,1 |
| Capacity of feeding auger, (metric tonnes/hr) | 25 | 25 | - | - | - |
| Capacity of unloading auger, (metric tonnes/hr) | 25 | 25 | 24 | 31 | 31 |
| Height, mm | 3050 | 4800 | 6450 | 7270 | 8480 |
| Length, mm | 5800 | 6440 | 5600 | 5600 | 5600 |
| Width, mm | 1900 | 2430 | 2500 | 2500 | 2500 |
| Dryer height in transport position, mm /second module, mm | 3050 | 3600 | 3450/1400 | 3450/2250 | 3450/3450 |

SALES / SERVICE
+38 (068) 168 33 81
phoenixtov@gmail.com

Address:
21022, Ukraine,
Vinnytsia,
Serhiya Zulinsky Street 30
Phoenix Technology LLC


Mobile grain dryers
Manufactured by «Phoenix»



Moisture indicator
moisture control at the outlet
in real time



Grain transportation

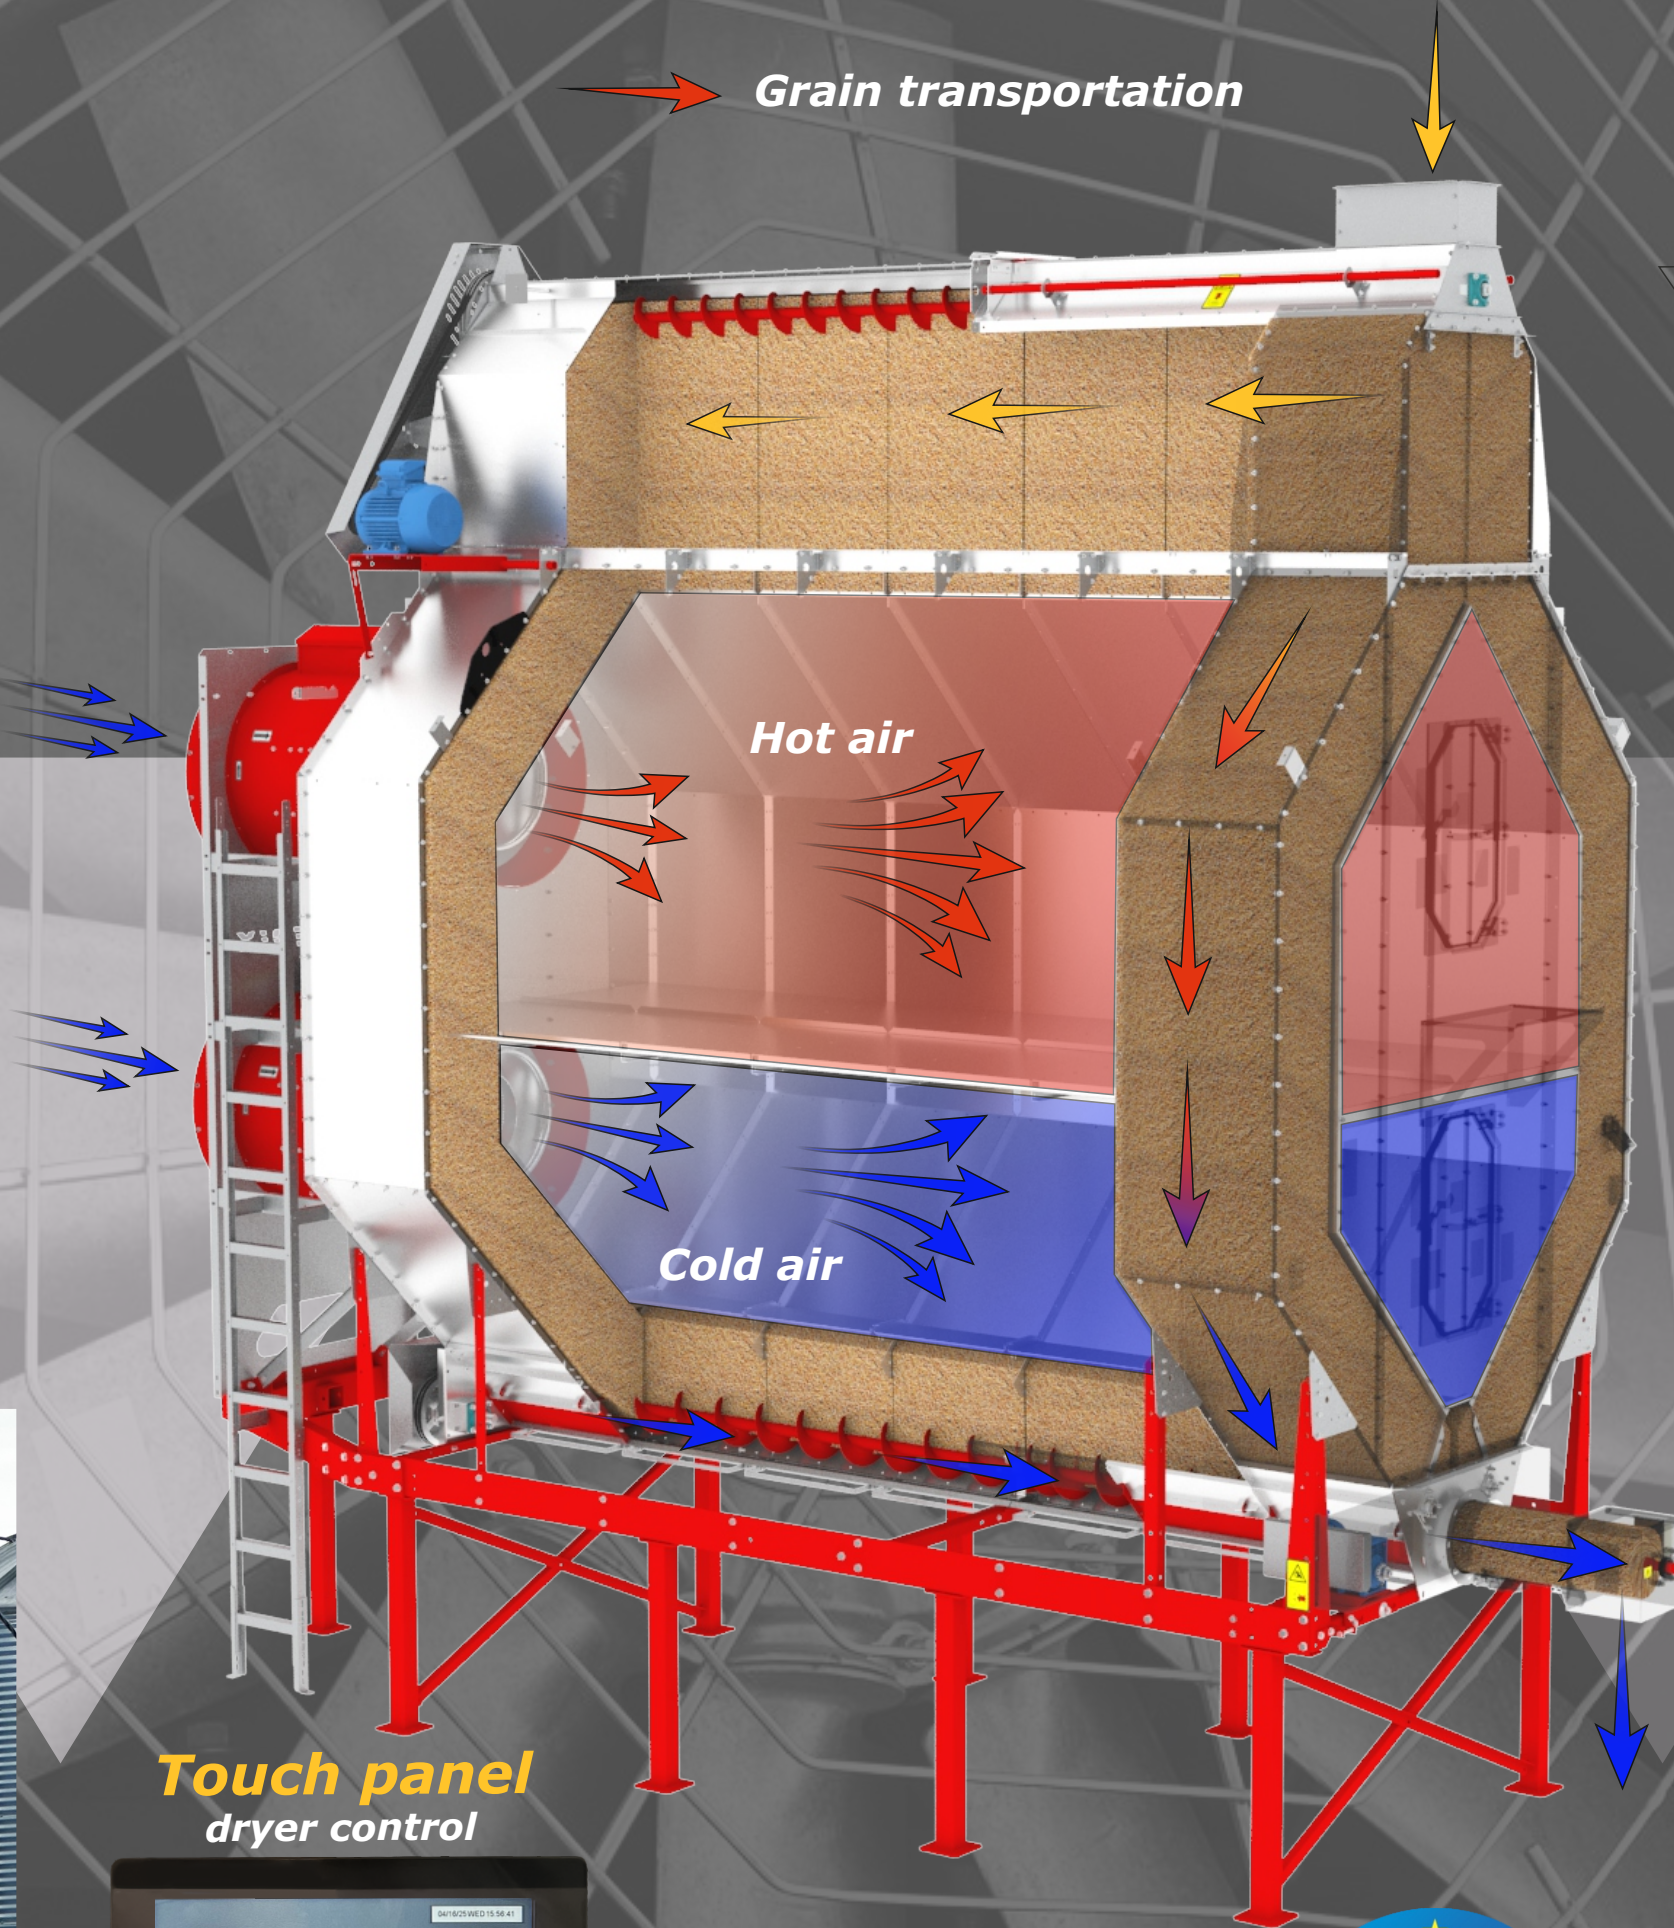

Wind protection

microclimate
in windy weather




Recuperation

savings of up to 25%
on fuel costs



Touch panel
dryer control

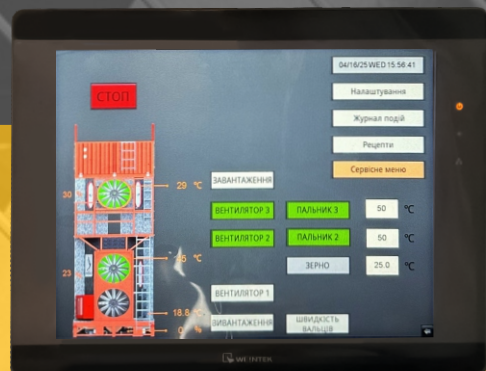

Dryer roof
for all weather conditions

